

20

FIG. 1

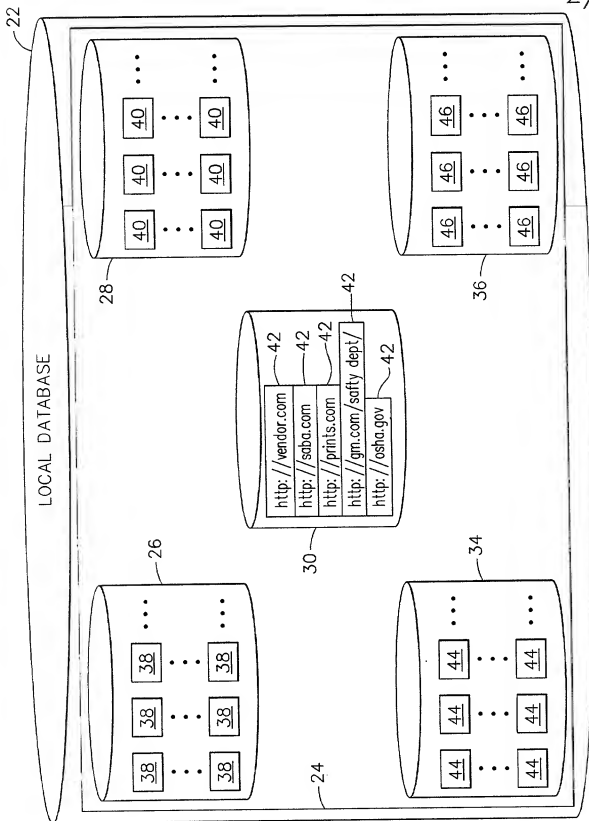


FIG. 2

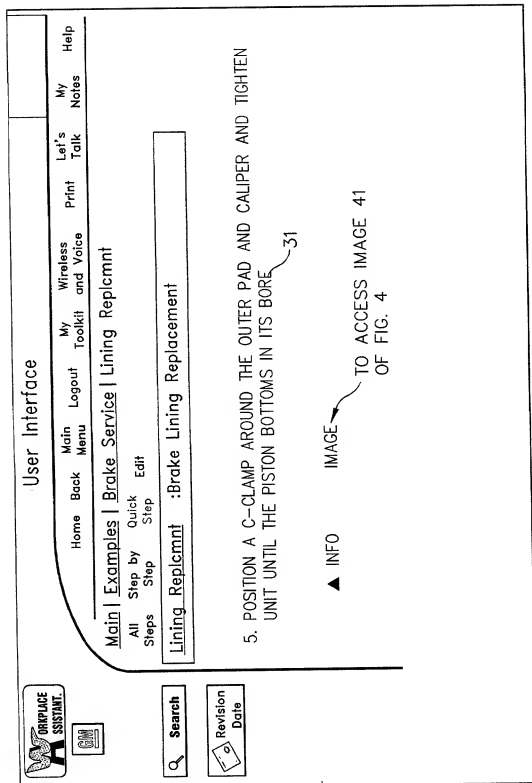


FIG. 3

5. POSITION A C-CLAMP AROUND THE OUTER PAD AND CALIPER AND TIGHTEN UNIT UNTIL THE PISTON BOTTOMS IN ITS BORE 31

▲ INFO IMAGE TO ACCESS IMAGE 41 OF FIG. 4

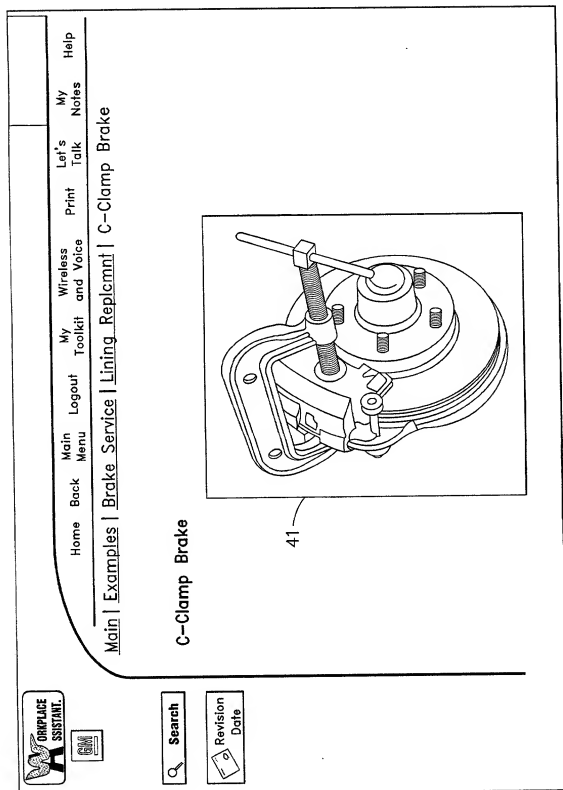
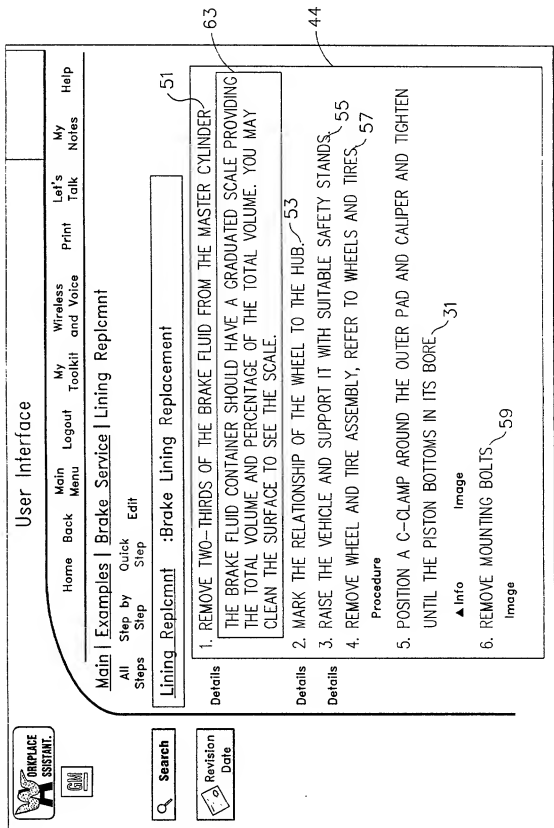


FIG. 4



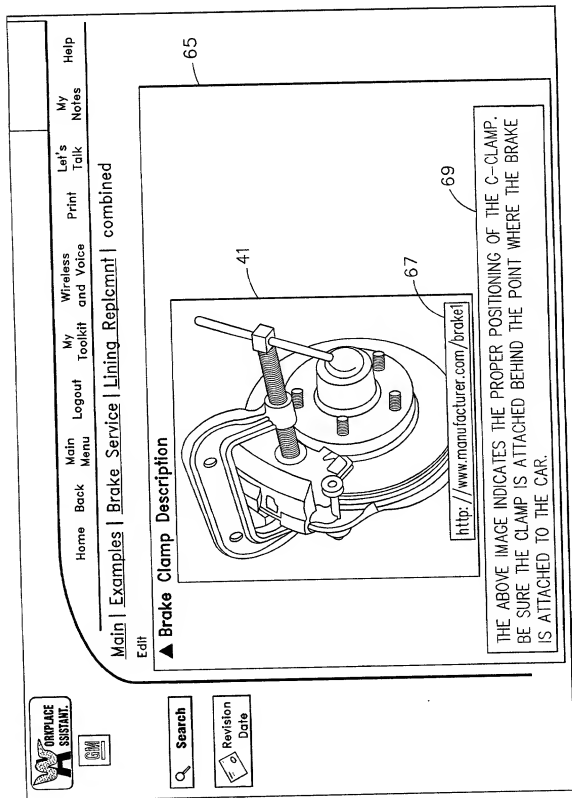


FIG. 6

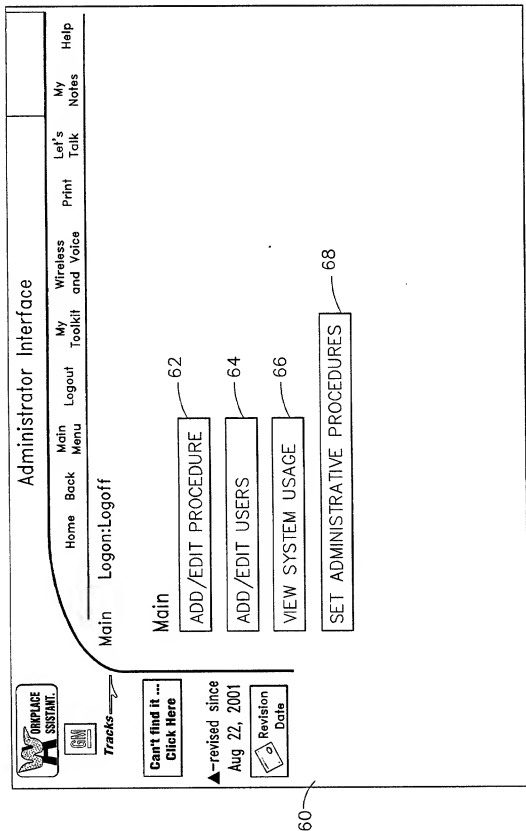
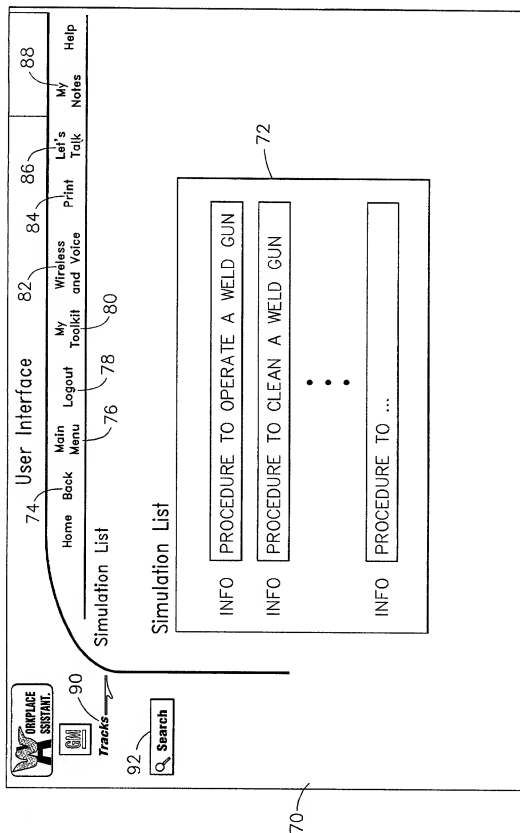


FIG. 7





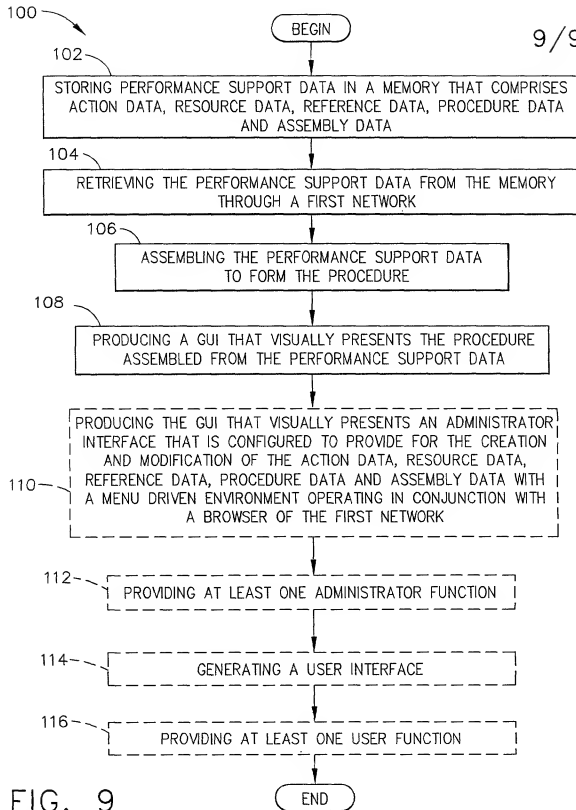


FIG. 9